CSE 167: Introduction to Computer Graphics Lecture #6: Lights

Jürgen P. Schulze, Ph.D. University of California, San Diego Spring Quarter 2016

Announcements

- Project 2 due next Friday at 2pm
- ▶ This Friday at 2pm: late grading project I
- Midterm #1 on Tuesday, April 26



- OpenGL Light Sources
 - Directional Lights
 - Point Lights
 - Spot Lights



Light Sources

- Real light sources can have complex properties
 - Geometric area over which light is produced
 - Anisotropy (directionally dependent)
 - Reflective surfaces act as light sources (indirect light)















In OpenGL we have to use a drastically simplified model to allow real-time rendering



Types of Light Sources

- At each point on surfaces we need to know
 - Direction of incoming light (the L vector)
 - Intensity of incoming light (the c_l values)
- ▶ Three light types:
 - Directional: from a specific direction
 - Point light source: from a specific point
 - Spotlight: from a specific point with intensity that depends on direction




- Light Sources
 - Directional Lights
 - Point Lights
 - Spot Lights



Directional Light

- Light from a distant source
 - Light rays are parallel
 - Direction and intensity are the same everywhere
 - As if the source were infinitely far away
 - Good approximation of sunlight
- Specified by a unit length direction vector, and a color

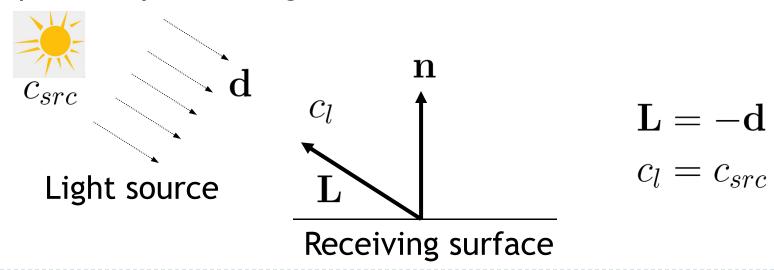



- Light Sources
 - Directional Lights
 - Point Lights
 - Spot Lights



Point Lights


- Similar to light bulbs
- Infinitely small point radiates light equally in all directions
 - Light vector varies across receiving surface
 - What is light intensity over distance proportional to?
 - Intensity drops off proportionally to the inverse square of the distance from the light
 - Reason for inverse square falloff: Surface area A of sphere:

$$A = 4 \pi r^2$$





Point Light Math

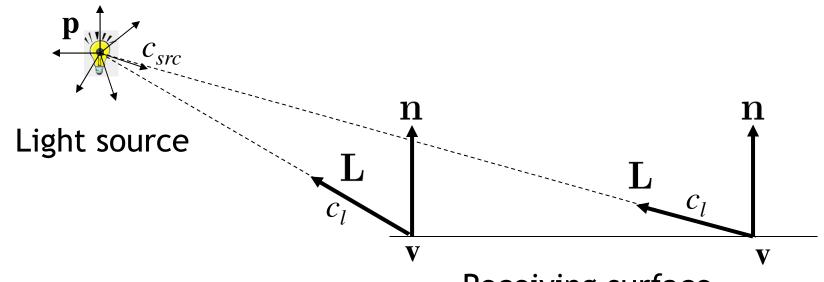

Receiving surface

At any point v on the surface:

$$\mathbf{L} = rac{\mathbf{p} - \mathbf{v}}{\|\mathbf{p} - \mathbf{v}\|}$$

Attenuation:

$$c_l = \frac{c_{src}}{\|\mathbf{p} - \mathbf{v}\|^2}$$



Light Attenuation

- Quadratic: $k^*(p-v)^2$
 - Most expensive, most accurate
- ▶ Linear: k*(p-v)
 - Less expensive, less accurate
- ▶ Constant: k
 - ▶ Fastest, least accurate



- Light Sources
 - Directional Lights
 - Point Lights
 - Spot Lights



Spotlights

Like point light, but intensity depends on direction


Parameters

- Position: location of light source
- Spot direction: center axis of light source
- Intensity falloff:
 - Beam width (cone angle)
 - The way the light tapers off at the edges of the beam (cosine exponent)





Spotlights

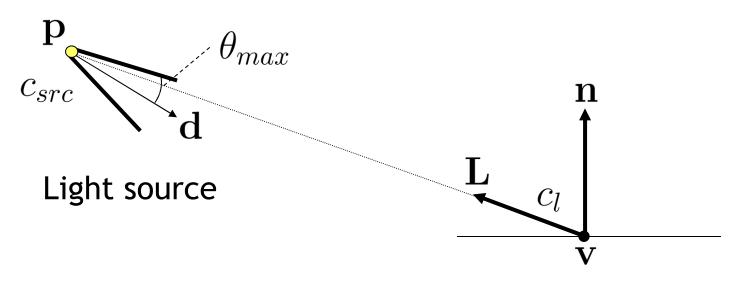

Receiving surface

$$\mathbf{L} = \frac{\mathbf{p} - \mathbf{v}}{\|\mathbf{p} - \mathbf{v}\|}$$

$$c_l = \begin{cases} 0 & \text{if } -\mathbf{L} \cdot \mathbf{d} \leq \cos(\theta_{max}) \\ c_{src} (-\mathbf{L} \cdot \mathbf{d})^f & \text{otherwise} \end{cases}$$



Example

- Diffuse lighting with a point light source
 - http://www.tomdalling.com/blog/modern-opengl/06-diffuse-point-lighting/

