# CSE 167:
# Introduction to Computer Graphics
# Lecture #18: Deferred Rendering

Jürgen P. Schulze, Ph.D.
University of California, San Diego
Fall Quarter 2012

# Announcements

- Thursday, Dec 13: Final project presentations in EBU-3B room 1202, 3-6pm
- Move CSE 190 (3D User Interfaces)
  - Currently scheduled for Mon/Wed 11-12:20
  - Conflicts with CSE 105 and CSE 141
  - Alternatives:
    - Mon/Wed 11:00-12:20pm
    - Mon/Wed 12:30-1:50pm
    - Mon/Wed 2-3:20pm
    - Tue/Thu 11-12:20pm
    - Tue/Thu 12:30-1:50pm
    - Tue/Thu 2-3:20pm

# Lecture Overview

- Deferred Rendering Techniques
  - Deferred Shading
  - Screen Space Ambient Occlusion
  - Bloom
  - Glow
- The Future of Computer Graphics

# Deferred Rendering

- Opposite to Forward Rendering, which is the way we have rendered with OpenGL so far
- Deferred rendering describes post-processing algorithms
  - Requires two-pass rendering
  - First pass:
    - Scene is rendered as usual by projecting 3D primitives to 2D screen space.
    - Additionally, an off-screen buffer (G-buffer) is populated with additional information about the geometry elements at every pixel
      - Examples: normals, diffuse shading color, position, texture coordinates
  - Second pass:
    - An algorithm, typically implemented as a shader, processes the G-buffer to generate the final image in the back buffer

# Lecture Overview

- Deferred Rendering Techniques
  - Deferred Shading
  - Screen Space Ambient Occlusion
  - Bloom
  - Glow
- The Future of Computer Graphics

# Deferred Shading

- Postpones shading calculations for a fragment until its visibility is completely determined
  - Only fragments that really contribute to the image are shaded
- Algorithm:
  - Fill a set of buffers with common data, such as diffuse texture, normals, material properties
  - For the lighting just render the light extents and fetch data from these buffers for the lighting computation
- Advantages:
  - Decouples lighting from geometry
  - Several lights can be applied with a single draw call: more than 1000 light sources can be rendered at 60 fps
- Disadvantages:
  - Consumes more memory, bandwidth and shader instructions than traditional rendering

*Particle system with glowing particles. Source: Humus 3D*

# Reference

- Deferred Shading Tutorial:
  - http://bat710.univ-lyon1.fr/~jciehl/Public/educ/GAMA/2007/Deferred_Shading_Tutorial_SBGAMES2005.pdf

# Lecture Overview

- Deferred Rendering Techniques
  - Deferred Shading
  - Screen Space Ambient Occlusion
  - Bloom
  - Glow
- The Future of Computer Graphics

# Screen Space Ambient Occlusion

- Screen Space Ambient Occlusion is abbreviated as SSAO
- "Screen Space" refers to this being a deferred rendering approach
- Rendering technique for approximating ambient occlusion in real time
- Developed by Vladimir Kajalin while working at Crytek
- First use in 2007 PC game Crysis

SSAO component

# Ambient Occlusion

- Attempts to approximate global illumination
  - Very crude approximation
- Unlike local methods like Phong shading, ambient occlusion is a global method
  - Illumination at each point is a function of other geometry in the scene
- Appearance achieved by ambient occlusion is similar to the way an object appears on an overcast day
  - Example: arm pit is hit by a lot less light than top of head
- In the industry, ambient occlusion is often referred to as "sky light"

# SSAO Demo

- Screen Space Ambient Occlusion (SSAO) in Crysis
  - http://www.youtube.com/watch?v=ifdAILHTcZk

# Basic SSAO Algorithm

- First pass:
  - Render scene normally and write z values to g-buffer's alpha channel
- Second pass:
  - Pixel shader samples depth values around the processed fragment and computes amount of occlusion, stores result in red channel
  - Occlusion depends on depth difference between sampled fragment and currently processed fragment

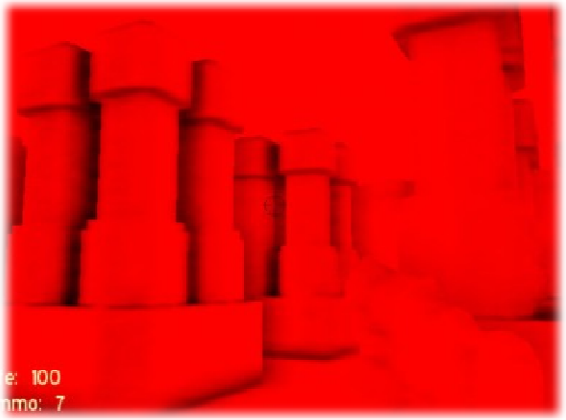

*Ambient occlusion values in red color channel*
*Source: www.gamerendering.com*

# SSAO With Normals

- First pass:
  - Render scene normally and copy z values to g-buffer's alpha channel and scene normals to g-buffer's RGB channels
- Second pass:
  - Use normals and z-values to compute occlusion between current pixel and several samples around that pixel

*No SSAO*

*With SSAO*

# SSAO Discussion

- Advantages:
  - Deferred rendering algorithm: independent of scene complexity
  - No pre-processing, no memory allocation in RAM
  - Works with dynamic scenes
  - Works in the same way for every pixel
  - No CPU usage: executed completely on GPU
- Disadvantages:
  - Local and view-dependent (dependent on adjacent texel depths)
  - Hard to correctly smooth/blur out noise without interfering with depth discontinuities, such as object edges, which should not be smoothed out

# References

- Nvidia's documentation:
  - http://developer.download.nvidia.com/SDK/10.5/direct3d/Source/ScreenSpaceAO/doc/ScreenSpaceAO.pdf
- SSAO shader code from Crysis:
  - http://69.163.227.177/forum.php?mod=viewthread&tid=772
- Another implementation:
  - http://www.gamerendering.com/2009/01/14/ssao/

# Lecture Overview

- Deferred Rendering Techniques
  - Deferred Shading
  - Screen Space Ambient Occlusion
  - Bloom
  - Glow
- The Future of Computer Graphics

# Bloom Effect


*Left: no bloom, right: bloom.*
*Source: http://jmonkeyengine.org*

- Bloom gives a scene a look of bright lighting and overexposure

# Bloom Shader

- Post-processing filter: applied after scene is rendered normally
- Step 1: Extract all highlights of the rendered scene, superimpose them and make them more intense
  - Operates on back buffer
  - Often done with off-screen buffer smaller than frame buffer
  - Highlights found by thresholding luminance
- Step 2: Blur off-screen buffer, e.g., with Gaussian blurring
- Step 3: Composite off-screen buffer with back buffer

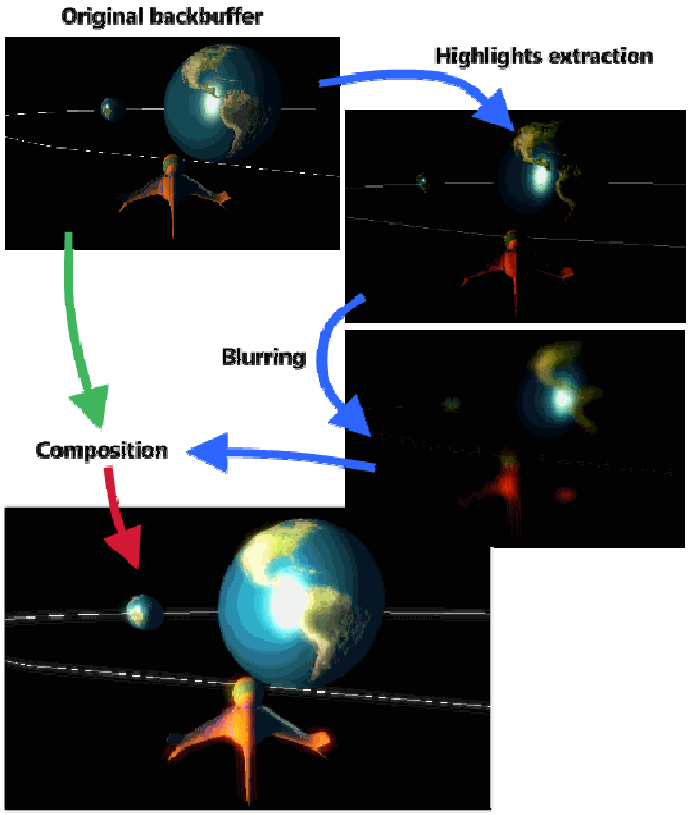


*Bloom shader render steps.*
*Source: http://www.klopfenstein.net*

# References

- Bloom Shader
  - http://www.klopfenstein.net/lorenz.aspx/gamecomponents-the-bloom-post-processing-filter
- GLSL Shader for Gaussian Blur
  - http://www.ozone3d.net/tutorials/image_filtering_p2.php

# Lecture Overview

- Deferred Rendering Techniques
  - Deferred Shading
  - Screen Space Ambient Occlusion
  - Bloom
  - Glow
- The Future of Computer Graphics

# Glow Effects

- Glows and halos of light appear everywhere in the world
- They provide powerful visual cues about brightness and atmosphere
- In computer graphics, the intensity of light reaching the eye is limited, so the only way to distinguish intense sources of light is by their surrounding glow and halos
- In everyday life, glows and halos are caused by light scattering in the atmosphere or within our eyes

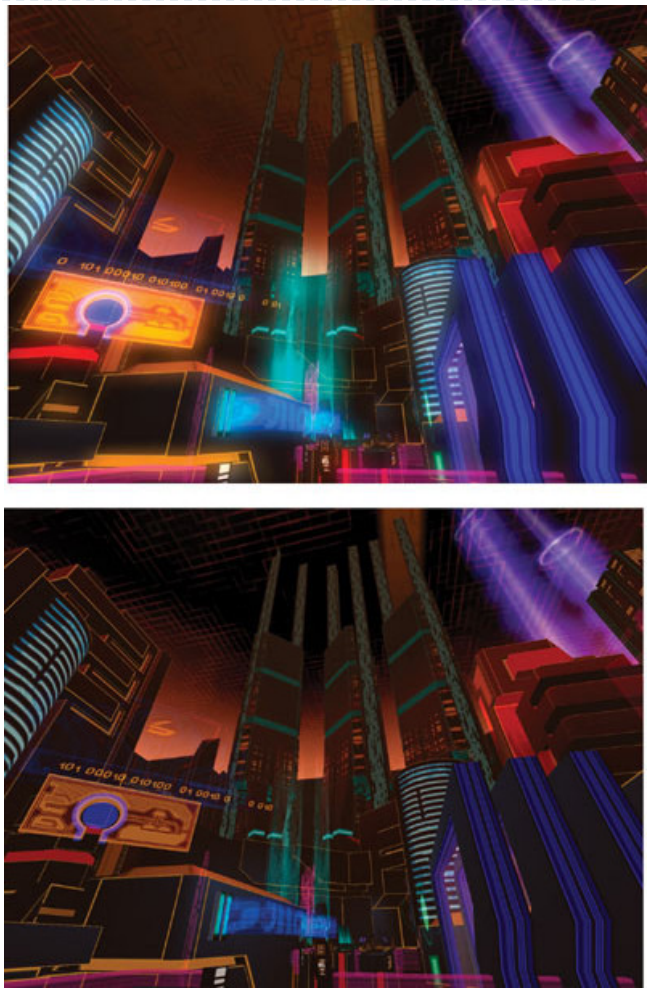

*A cityscape with and without glow.*
*Source: GPU Gems*

# Glow vs. Bloom

- Bloom filter looks for highlights automatically, based on a threshold value
- If you want to have more control over what glows and does not glow, a glow filter is needed
- Glow filter adds an additional step to Bloom filter: instead of thresholding, only the glowing objects are rendered
- Render passes:
  - Render entire scene back buffer
  - Render only glowing objects to a smaller off-screen glow buffer
  - Apply a bloom pixel shader to glow buffer
  - Compose back buffer and glow buffer together

# References

- GPU Gems Chapter on Glow
  - http://http.developer.nvidia.com/GPUGems/gpugems_ch21.html
- Bloom and Glow
  - http://jmonkeyengine.org/wiki/doku.php/jme3:advanced:bloom_and_glow

# Lecture Overview

- Deferred Rendering Techniques
  - Deferred Shading
  - Screen Space Ambient Occlusion
  - Bloom
  - Glow
- The Future of Computer Graphics

# Videos

- ACM Siggraph Asia, 28.11.-1.12.2012 in Singapore (3:18)
  - http://www.youtube.com/watch?v=l81MqEWmR-g
- ACM Siggraph, July 21-25, 2013, Anaheim
  - Student volunteer application deadline: Feb 5, 2013

- Crytek Shows Off the Future of Game Graphics (2:54)
  - http://www.youtube.com/watch?v=dEBuJK-7L5o
- Corning – A Day Made of Glass (5:59)
  - http://www.youtube.com/watch?v=jZkHpNnXLB0

Good luck with your final projects!